

WORLD 1.0

for



Version 1.0

October 2, 2015

Table of Contents

About.....	3
Using the editor.....	4
Voxel Converter.....	4
Voxel Mesh.....	5
Voxel Particle System.....	6
Using the programming interface.....	7
namespace Voxels.....	7
class Voxels.Converter.Settings.....	7
class Voxels.Converter.....	9
abstract class Voxels.Converter.Processor.....	11
class Voxels.Converter.Engine.....	12
class Voxels.Storage.....	14
class Voxels.HSVColor.....	16

About

“Voxels for Unity” is a plug-in extension for the Unity engine and development environment (www.Unity3D.com). It utilizes the graphics hardware to rasterize render objects into a three-dimensional grid instead of a 2D planar surface, which is done to present them on a screen or to compute effects most of all. As opposed to other existing solutions it is able to bake a lot of shading and lighting conditions into the target color of every grid cell at the moment of the processing. Such cells are called voxels, which is a composition of **volume** and **pixels**. You can use them to display grid aligned (e.g. blocky) models or particles, which are generated from existing assets. Those particles can be used to create visual effects in combination with the original objects or you transfer the data to an existing voxel engine respectively a rendering framework.

The extension is executable in the editor and at runtime and therefore provides an inspector and a programming interface, which can be accessed from other scripts. And the complete package includes two sample processing classes, which are converting the gathered data to visible game objects. One creates a hierarchy of meshes while the other passes the grid elements to a particle system. You are able to adapt the existing examples or write your own processor scripts using the derivation from a base class.

Unfortunately not all rendering features can be baked into the final voxel colors because the culling system of Unity hides them in the scanning process. Known issues are dynamic shadow maps and particles. The first one can still be applied to converted voxel objects but cannot be included in the color of the object itself. We are still looking for workarounds or alternative rendering methods to be provide the support in future releases.


Using the editor

Voxel Converter

After you have imported the package to your Unity project, you can attach the Voxel Converter plug-in to any game object, even multiple times. In the hierarchy any object under the modified one or the modified one itself should contain a visual component like a mesh renderer or a terrain. Otherwise nothing could be rasterized to the volume grid.

You get an inspector for every converter instance. If you turn the switch off, it will not automatically being executed at the start of the scene.

Boundaries: *Minimum* and *Maximum* are the limiting 3D vectors of the volume in the scene, which is being scanned for voxels. By pressing on the *Adopt from object* button both values are measured by combining the current bounds of all attached objects.

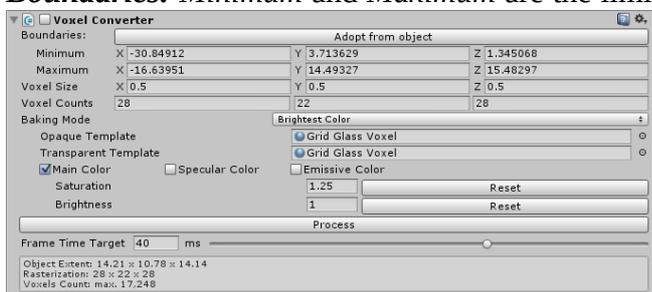

Voxel Converter inspector with all properties


Voxel Size: This is the extent of one grid cell in the space of the scene.

Voxel Counts: It describes the number of columns, rows and slices the volume grid contains.

Voxel Size and *Voxel Counts* are affecting one another, where the counts are the outcome of the total volume and the single cell size.

Baking Mode: The shaded colors of a source object can be interpreted in various ways. By using *Original Material* the color is not baked at all. The source material, which is located at a cell, is transferred directly to its voxel. On the contrary *Averaged Color*, *Darkest Color* and *Brightest Color* burn the shaded result color to a material, which is used in association with renderer of the single voxel. *Most Frequent Color* works similar but does not simply averages all detected cell colors or builds the mini- or maximum of them but filters by the amount of their occurrences.

Opaque Template: This option only appears, if you have selected a color baking mode. You can specify a default material, which is used, if the alpha value of the grid cell is 1. This means that the voxel is originally not a transparent one. Without a selection a standard legacy material is created.

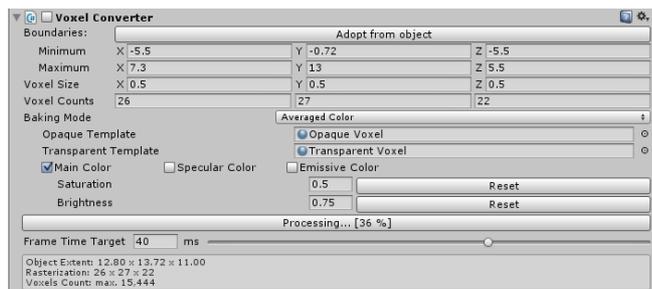

Voxel Converter shows the current progress

Transparent Template: Comparable to Opaque Template it allows the choice of a material, which is used for semi-transparent cells, which means that the alpha value is between 0 and 1.


Main Color / Specular Color / Emissive Color: Here you can select, which component of the

applied material is modulate by the result color of the baking.

Saturation: This factor allows the manipulation of the result color by making it more or less colorful.


Brightness: A material can be made darker or lighter by modifying it.

Process / Processing... / Waiting...: That button starts or stops the conversion of the selected object from the editor. It also shows the current state: *Processing...* signals that the object is currently being processed and shows the progress, whereas *Waiting...* represents that another object is currently in conversion and indicates the position in the queue.

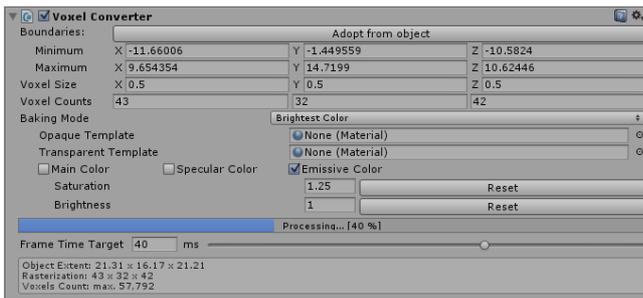

At runtime the button does not appear and will be replaced by a progress bar during the conversion.

Frame Time Target: This is a global setting, which affects all converter instances and adjusts the aimed frame rate. Because the processing cannot be done in real-time it happens in cooperation with the other work load of Unity and your scene. The approximate value allows you to specify to amount of time, which should be used for total processing between two frames, but it can be more in complex scenarios.

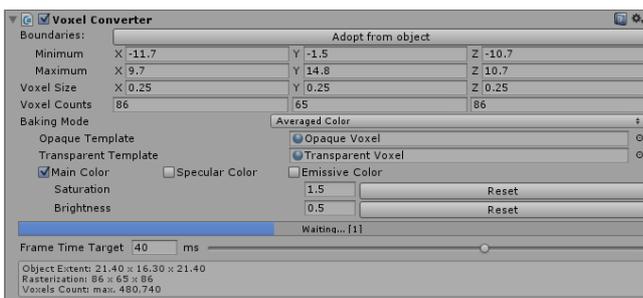


Voxel Converter inspector at runtime while processing

At last there is a box with some information about the volume size, the grid resolution and maximum count of resulting voxels, if all grid cells would get filled. You can make use of the data to adapt setting for a target specification.

Voxel Mesh

One of the two sample processor scripts constructs a hierarchy of meshes from the data, which has been collected by the converter instance. That instance transfers gathered voxels to active processor components, which are attached at the same game object like the converter.

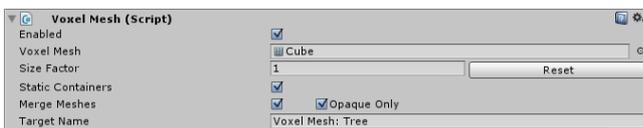

Voxel Mesh inspector

Enabled: The flag activates the processing of incoming data.

Voxel Mesh: You have to select a template, which is used to represent a voxel. Most often a cube might be the general choice. Nevertheless you are able to choose any imported mesh asset like a sphere. But beware of the vertex / polygon count: Thousands of voxels multiplied by thousands of triangles turn into millions of polygons that need to be processed per frame.

Size Factor: That value increases or decreases the extent of one cell mesh, which is normalized to fit the voxel size declared in the converter.

Static Containers: It is a flag, which is copied to new game object that will be created during the processing. If you want to animated single voxels, you should turn it off.


Merge Meshes: Multiple voxels that share the same material will be merged into larger meshes. So single cells cannot be moved by individual game object transform components any longer but shaders can be used to do so.

Opaque Only: Whenever *Merge Meshes* is enabled that flag skips the combination of voxels, which have got semi-transparent alpha values. This is important if you want to retain the correct blending order from camera view with the standard Unity solution.

Target Name: The main container of the target object is named after the string, which is given here.

Voxel Particle System

The second sample class builds a system of particles using the incoming data. You are able to combine it with other processors, so that the same data is processed into different objects.



Enabled: Equally to Voxel Mesh it activates or deactivates the processing of the component.

Voxel Particle System inspector

Object Template: That needs to be game object

instance with a predefined particle system, which is instantiated as a new one for the target.

Size Factor: It is the factor, which is multiplied with the standard particle size of a voxel cell.

Target Name: The recently instantiated template gets the stated name.

Using the programming interface

namespace Voxels

All structures, enumerations and classes of the extension are collected in that main namespace.

struct	Vector	A vector with a coordinate (column, line, slice) in voxel space
int	x	
int	y	
int	z	
enum	BakingOperation	Method to interpret sampled colors per volume cell
	Undefined	
	OriginalMaterial	• Use material of the source object(s)
	AveragedColor	
	DarkestColor	• Apply average, darkest, brightest or most frequent sampled color of a cell to a derived material
	BrightestColor	
	MostFrequentColor	

class Voxels.Converter.Settings

This class is used to deliver scanning and properties to the engine.

UnityEngine.Bounds	bounds	Center and size of volume to scan
UnityEngine.Vector3	voxelSize	Size of a volume cell in scene space
Voxels.Vector	volumeResolution	Number of columns, rows and slices in the scan volume
int	samplingResolution	[not supported yet]
Voxels.BakingOperation	bakingOperationMode	Type of method to use for casting scanned material or color
UnityEngine.Material	opaqueTemplate	A material, which is used to apply non-transparent cell colors to
UnityEngine.Material	transparentTemplate	A material, which is used to apply semi-transparent cell colors to
bool	mainColorModulation	Flag to modulate main color of the instantiated material by the cell content
bool	specularColorModulation	Flag to modulate specular color of the instantiated material by the cell content
bool	emissiveColorModulation	Flag to modulate emissive color of the instantiated material by the cell content

float	saturationFactor	Modifies chroma of the cell color
float	brightnessFactor	Modifies luminosity of the cell color
float	budgetTime	Frame time target for that specific conversion (<0 for standard value)

There are no other methods beside the two constructors, which are quite similar. One is for setting the size per voxel, the other to use a target resolution for the complete volume.

```
Settings(
    UnityEngine.Bounds bounds,
    UnityEngine.Vector3 voxelSize,
    int samplingResolution,
    Voxels.BakingOperation bakingOperationMode,
    UnityEngine.Material opaqueTemplate,
    UnityEngine.Material transparentTemplate,
    bool mainColorModulation,
    bool specularColorModulation,
    bool emissiveColorModulation,
    float saturationFactor,
    float brightnessFactor,
    float budgetTime = -1
)
```

Initialize values including voxel size and set volume resolution to zero, which leads to an automatic calculation.

```
Settings(
    UnityEngine.Bounds bounds,
    Voxels.Vector volumeResolution,
    int samplingResolution,
    Voxels.BakingOperation bakingOperationMode,
    UnityEngine.Material opaqueTemplate,
    UnityEngine.Material transparentTemplate,
    bool mainColorModulation,
    bool specularColorModulation,
    bool emissiveColorModulation,
    float saturationFactor,
    float brightnessFactor,
    float budgetTime = -1
)
```

Initialize values including volume resolution and set voxel size to zero, which leads to an automatic calculation.

Parameters:

See member variables

class Voxels.Converter

That is the instance for a game object to equip it with serializable conversion settings.

UnityEngine.Vector3	minimumBound	Smaller edge of the volume to scan for voxels
UnityEngine.Vector3	maximumBound	Larger edge of the volume to scan for voxels
UnityEngine.Vector3	voxelSize	Extent of a voxel cell
int	resolutionWidth	Number of columns in the volume
int	resolutionHeight	Number of rows in the volume
int	resolutionDepth	Number of slices in the volume
Voxels.BakingOperation	bakingOperationMode	Method to process scanned materials / colors
UnityEngine.Material	opaqueTemplate	Material to use for non-transparent cells
UnityEngine.Material	transparentTemplate	Material to use for cells with alpha value smaller than one
bool	mainColorModulation	Flag to multiply main color of the template / default material with scanned cell one
bool	specularColorModulation	Flag to multiply specular color of the template / default material with scanned cell one
bool	emissiveColorModulation	Flag to multiply emissive color of the template / default material with scanned cell one
float	saturationFactor	Value makes cell colors more or less colorful
float	brightnessFactor	Value makes cell colors brighter or darker
float	budgetTime	Target time to limit total computation per frame to

```
bool Process(  
    )
```

Transfer the game object for voxel conversion to crafting singleton using the applied settings and attached processors.

Return Value:

true, if processing initialization could be successfully completed.
false, if a failure occurred.

```
bool Stop(  
    )
```

End the conversion of the game object.

Return Value:

true, if game object has been successfully removed from processing.
false, if object is not being processed.

```
float GetProgress(  
    )
```

Read current conversion progress.

Return Value:

> **1**, if object is waiting to be processed.
0 ... 1, if object is currently being processed.
-1, if object is not included in the processing queue.

```
void RecomputeBounds(  
    )
```

Adopt boundaries of the volume, which is scanned for voxels, from the renderers of the game object and its children.

```
bool SetVoxelSize(  
    float width  
    float height,  
    float depth  
    )
```

Change the size of a voxel cell in scene space. Calling this function invalids volume resolution values.

Return Value:

true, if arguments are valid.

Parameters:

width	Width of a voxel
height	Height of a voxel
depth	Depth of a voxel

```
bool SetVolumeResolution(  
    int width,  
    int height,  
    int depth  
)
```

Change the numbers of cell columns, rows and slices of the whole volume. Calling this function invalids voxel size values.

Return Value:

`true`, if arguments are valid.

Parameters:

width	Cell columns
height	Cell rows
depth	Cell slices

```
bool IsVolumeResolutionDefined(  
    )
```

Check if volume resolution is set. Otherwise the voxel size is used for generating cells.

Return Value:

`true`, if volume resolution is used to define number of scanning cells.
`false`, if voxel size is used to calculate number of scanning cells.

abstract class Voxels.Converter.Processor

This class is used as a base interface to implement functions to handle the voxel data, which had been collected by the engine right before. You have to derive your own classes from it like [VoxelMesh](#) and [VoxelParticleSystem](#) are.

<code>bool</code>	process	This flag indicates, if the processor is being executed by the engine.
-------------------	----------------	--

```
float Build(  
    Voxels.Storage voxels,  
    UnityEngine.Bounds bounds  
)
```

The method is repeatedly called to process incoming data until it signals the completion.

Return Value:

`0 ... <1` is the current progress. Processing has not been finished.
`>=1` signals the end of processing.

Parameters:

voxels	Instance containing collected voxel data
bounds	Boundaries, which have been used to scan the source object(s) and therefore define the volume of the data

class Voxels.Converter.Engine

For scanning and transferring the result data to processor classes a singleton of this type is created. You cannot instantiate it from outside but that is not necessary because the public methods are static and therefore no object is required to call them.

<code>bool</code>	Processing	Read-only property returns if the engine is currently at work
<code>UnityEngine.Bounds</code>	ObjectBounds	Read-only property returns center and size of source object, which is currently being processed

```
bool Process(  
    Voxels.Converter converter,  
    Voxels.Converter.Settings settings,  
    Voxels.Converter.Processor[] processors  
)
```

Append given voxel converter component altogether with settings and processor instance to waiting queue and start conversion, if previous entries have been completed or aborted.

Return Value:

`true`, if converter could be successfully added to the list.

Parameters:

converter	Component of the source object, which should be converted
settings	Conversion settings
processors	Array of processor class instances, which handle the result data

```
bool Process(  
    UnityEngine.GameObject source,  
    Voxels.Converter.Settings settings,  
    Voxels.Converter.Processor[] processors  
)
```

Append given game object altogether with settings and processor instance to waiting queue and start conversion, if previous entries have been completed or aborted. There is no converter instance used for enhanced access.

Return Value:

`true`, if converter could be successfully added to the list.

Parameters:

source	Source object, which should be converted
settings	Conversion settings
processors	Array of processor class instances, which handle the result data

```
bool Stop(  
    Voxels.Converter converter  
)
```

Remove given voxel converter from processing queue.

Return Value:

true, if converter could be found in the waiting list or processing has been stopped.

Parameters:

converter Component of the source object, whose conversion has to be canceled

```
float GetProgress(  
    Voxels.Converter voxelConverter  
)
```

Retrieve current conversion progress for given converter instance.

Return Value:

> **1**, if object is waiting to be processed.
0 ... 1, if object is currently being processed.
-1, if object is not included in the processing queue.

Parameters:

voxelConverter Component of the source object, whose state is requested

```
bool IsActive(  
)
```

Method answers if the singleton is currently alive.

Return Value:

true, if engine instance exists.

```
UnityEngine.Bounds ComputeBounds(  
    UnityEngine.GameObject gameObject  
)
```

Compute the bounding box of the given object and all its children.

Return Value:

Center and half size (Unity standard)

Parameters:

gameObject Top object to be measured
settings Conversion settings
processors Array of processor class instance, which handle the result data

class Voxels.Storage

The result data is filed and can queried using this class.

<code>int</code>	Width	Read-only property returns number of cell columns
<code>int</code>	Height	Read-only property returns number of cell rows
<code>int</code>	Depth	Read-only property returns number of cell slices
<code>int</code>	FacesCount	Read-only property returns number of faces per cell (fixed to 6)
<code>int</code>	Count	Read-only property returns total number of stored cells

```
bool SetIndex(  
    int x,  
    int y,  
    int z,  
    UnityEngine.CubemapFace face,  
    int index,  
    int sx = 0,  
    int sy = 0,  
    int sz = 0  
)
```

Store the given (material) index for the given direction to the given coordinate.

Return Value:

`true`, if cell content could be written.

Parameters:

<code>x, y, z</code>	Coordinate of the cell in volume space
<code>face</code>	Direction of the cell cube plane to store index for
<code>index</code>	Value to write
<code>sx, sy, sz</code>	Sub-sampling coordinate in cell space

```

bool SetColor(
    int x,
    int y,
    int z,
    UnityEngine.CubemapFace face,
    UnityEngine.Color color,
    int sx = 0,
    int sy = 0,
    int sz = 0
)

```

Store the given color value for the given direction to the given coordinate.

Return Value:

true, if cell content could be written.

Parameters:

x, y, z	Coordinate of the cell in volume space
face	Direction of the cell cube plane to store index for
color	Value to write
sx, sy, sz	Sub-sampling coordinate in cell space

```

bool AddColor(
    int x,
    int y,
    int z,
    UnityEngine.CubemapFace face,
    UnityEngine.Color color,
    int sx = 0,
    int sy = 0,
    int sz = 0,
    Voxels.BakingOperation operationMode = Voxels.BakingOperation.Undefined
)

```

Include the given color value for the given direction to the given coordinate using the given or the internally stored baking mode.

Return Value:

true, if cell content could be written.

Parameters:

x, y, z	Coordinate of the cell in volume space
face	Direction of the cell cube plane to store index for
color	Value to account
sx, sy, sz	Sub-sampling coordinate in cell space
operationMode	Baking operation to use for applying input against existing color

```

UnityEngine.Material GetMaterial(
    int x,
    int y,
    int z,
    Voxels.BakingOperation operationMode = Voxels.BakingOperation.Undefined
    int normalized = true
)

```

Return the source material of the cell or a newly instantiated one with the optionally modulated color of the voxel.

Return Value:

An existing or a new material instance

Parameters:

x, y, z	Coordinate of the cell in volume space
operationMode	Baking operation to use for applying input against existing color
normalized	Flag to remove pre-multiplication of alpha from red, green and blue components

class Voxels.HSVColor

It is kind of a helper class to apply color modifications and stores color values as hue, saturation and value components.

float	h	Hue component
float	s	Saturation component
float	v	Value component
float	a	Alpha value (inverted transparency)

```

HSVColor(
    float h,
    float s,
    float v,
    [float a]
)

```

Common constructor to initialize member variables

Parameters:

See member variables

```

HSVColor(
    UnityEngine.Color col
)

```

Initialize member variables using a RGBA color value as input.

Parameters:

See member variables

```
UnityEngine.Color ToColor(  
    )
```

Build a RGBA color value from instance.

Return Value:

Converted color result

```
Voxels.HSVColor Lerp(  
    Voxels.HSVColor a,  
    Voxels.HSVColor b,  
    float t  
    )
```

Do a linear interpolation between two HSV color values.

Return Value:

Blending result value

Parameters:

a, b	Source colors
t	Interpolation factor; should be between 0 and 1